


- Once unpacked, lay the frame flat on the floor.
- Remove the red tape around the wheel's screw and insert the screw into the vertical tube of the frame. (This operation might require protective gloves as the screws are quite greasy!)
- The first metal collar must fit inside the vertical tube. Some pressure might be required as the fit is tight.
- Make sure that the silver metal rings (rotation collars) do not come off the stem of the wheel during manipulation. Repeat the operation with all 3 wheels.
- The trolley should now stand on its wheels.



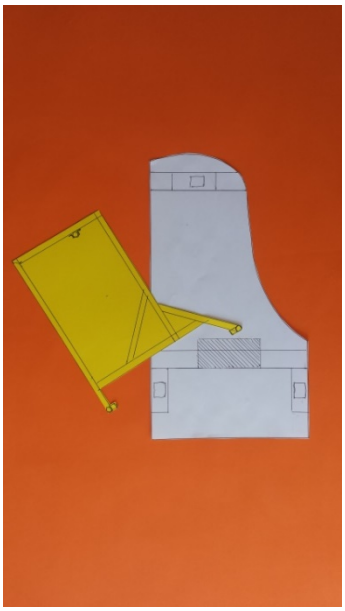

- Lower the 3 lifting screws to their lowest position. There will be then approx. 30mm play that will allow the trolley to roll underneath your piano.
- Roll the frame gently underneath the piano, coming in from the left hand side (low keys side).

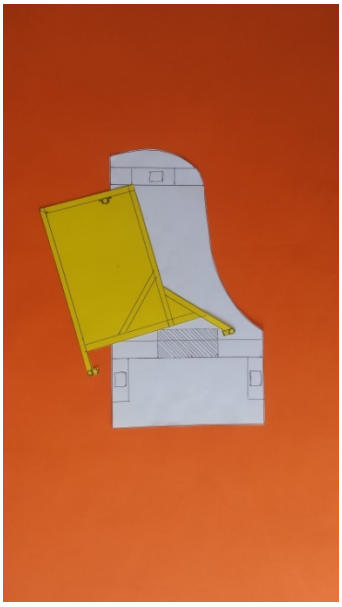


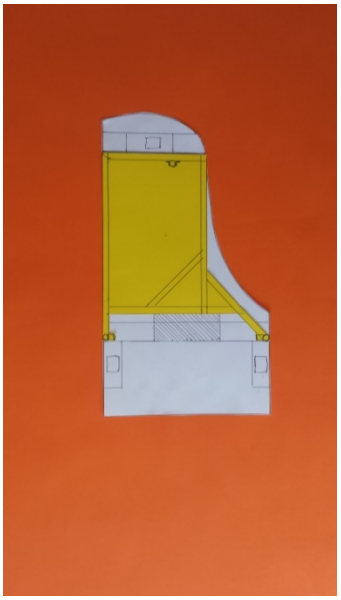

1 2 3

Note: If the trolley catches on the back leg of the piano during this operation, please remove the vertical pole on the right hand-side and replace once the trolley is in place.


- Make sure that you do not damage the re-inforcement diagonal bars of the piano's pedals during this operation.

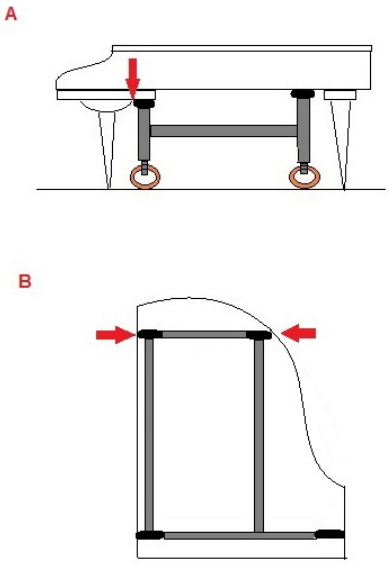- Once below the piano, the frame should be positioned in such a way that the rubber blocks of the vertical pillars go:
  1. A front – right against the base of the front legs of the piano
  2. B back – at that edge of both sides of the base of the tail end of the piano.
     Note: the 2 vertical poles can be positioned in two ways: in the length of the piano or across. It is the owner's choice.



Correct position

- Lock the wheels by pressing on the ON pedal with your foot. Make sure that the pillars of the frame remain in the right position below the piano.

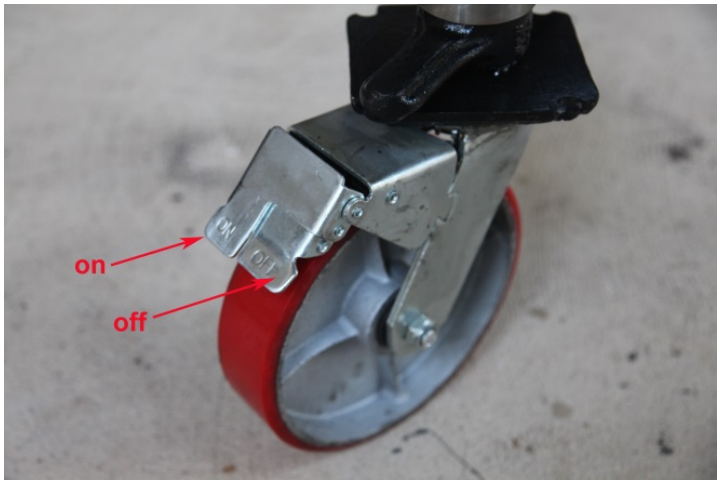

- Raise the frame by turning the butterfly screw of each of the 3 wheels one by one. **Turn anti-clockwise**, using both hands. Turn until each of the original wheels of the piano are slightly raised from the floor (approx. 1cm).




- Once all 3 legs of the piano are slightly off the ground, release the brakes by pressing the OFF pedal with your foot.



The piano is now ready to move and do its ballet demonstration!
Enjoy!

PS: in case the needle bearing system comes off the tube when installing the wheels, it is composed of 5 pieces lying on top of each-other. Please note that washer 2 has a smaller ID than washer 1.

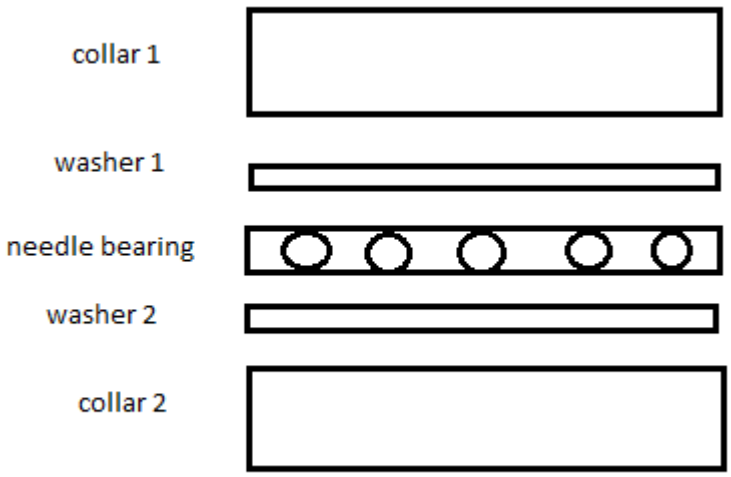

April 2017