
Panasonic

20190510

Cell Type BK-3MCCF

Specifications

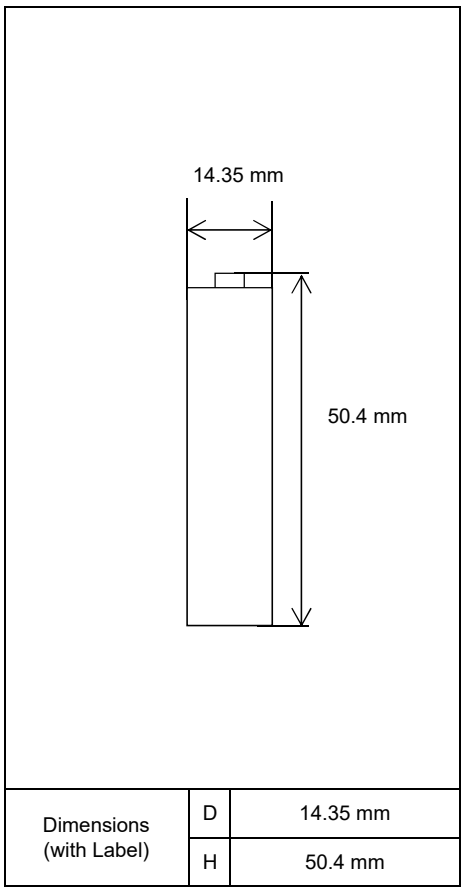


Dimensions (with Label)	D	14.35 mm
	H	50.4 mm

Type : Nickel-Metal Hydride Battery			Size : AA Industrial Type (Button top)
Countty of origin			Japan
Capacity 1)	Minimum		1900mAh
Nominal Voltage			1.2V
Charging Current x Time		Fast Charge 2)	Max.1900mA
Ambient Temp.	Charge Condition	Fast Charge 2)	0°C - 40°C
	Discharge Condition		-20°C - 50°C
	Storage Condition	Less than 90days	-20°C - 40°C
		Less than 1year	-20°C - 30°C
Internal Impedance 3) (after discharge to E.V.=1.0V)			Approx. 25mΩ (at 1000Hz)
Weight 4)			Approx.27g
Size 4) :(Diameter) x (Height)			14.35(D) x 50.4(H) mm

1)Single cell capacity under the following condition.
Charge : 190mA×16h, Discharge : 380mA(E.V.=1.0V) at 25°C
2)Use recommended charging system.
3)After a few charge and discharge cycles under the above 1) condition.
4)With Label.

Typical Characteristics

Charge

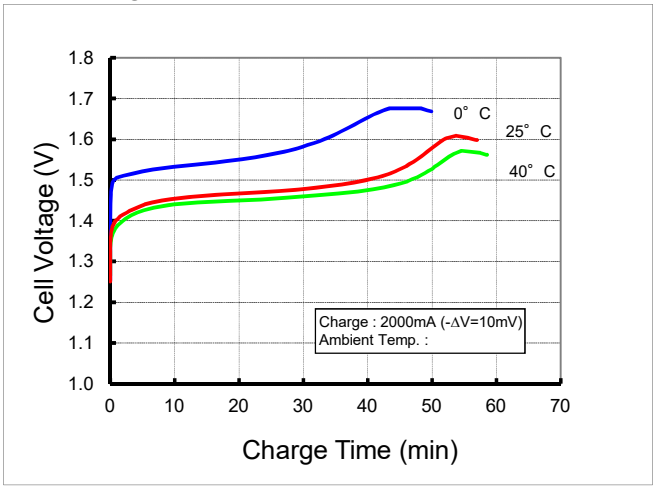

Discharge

